
Pro



Fully automatic bicycle cleaning.

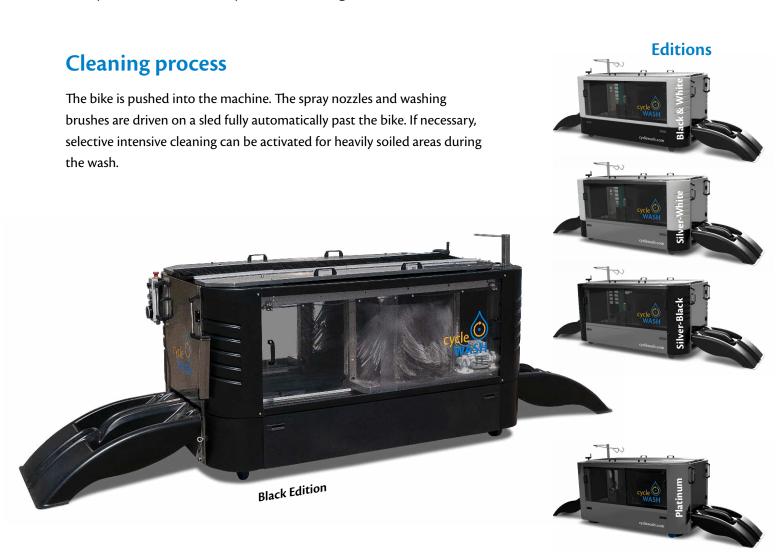

ECO-Mode

The ECO-Mode does not require a permanent water connection and can be filled with a few buckets of water on site and refilled if necessary. Due to the closed water circuit with water cyclone and filter system, the water is constantly circulated and cleaned. This version is the right choice, especially for frequent changes of location and events, as it is independent of the local water installation.

HYBRID-Mode

The HYBRID-Mode has a fixed fresh water connection and is particularly suitable for high loads with numerous successive washes. The automatic detergent dosage ensures a permanently constant cleaning result. The water consumption is much lower than a high pressure cleaner approx. 4l / min


cycleWASH Pro

Fully automatic bike cleaning in a fully integrated all-in-1 system – our most advanced technology!

Anti-gravity pendulum washing brushes

with three bearings, also reach higher places on the bike



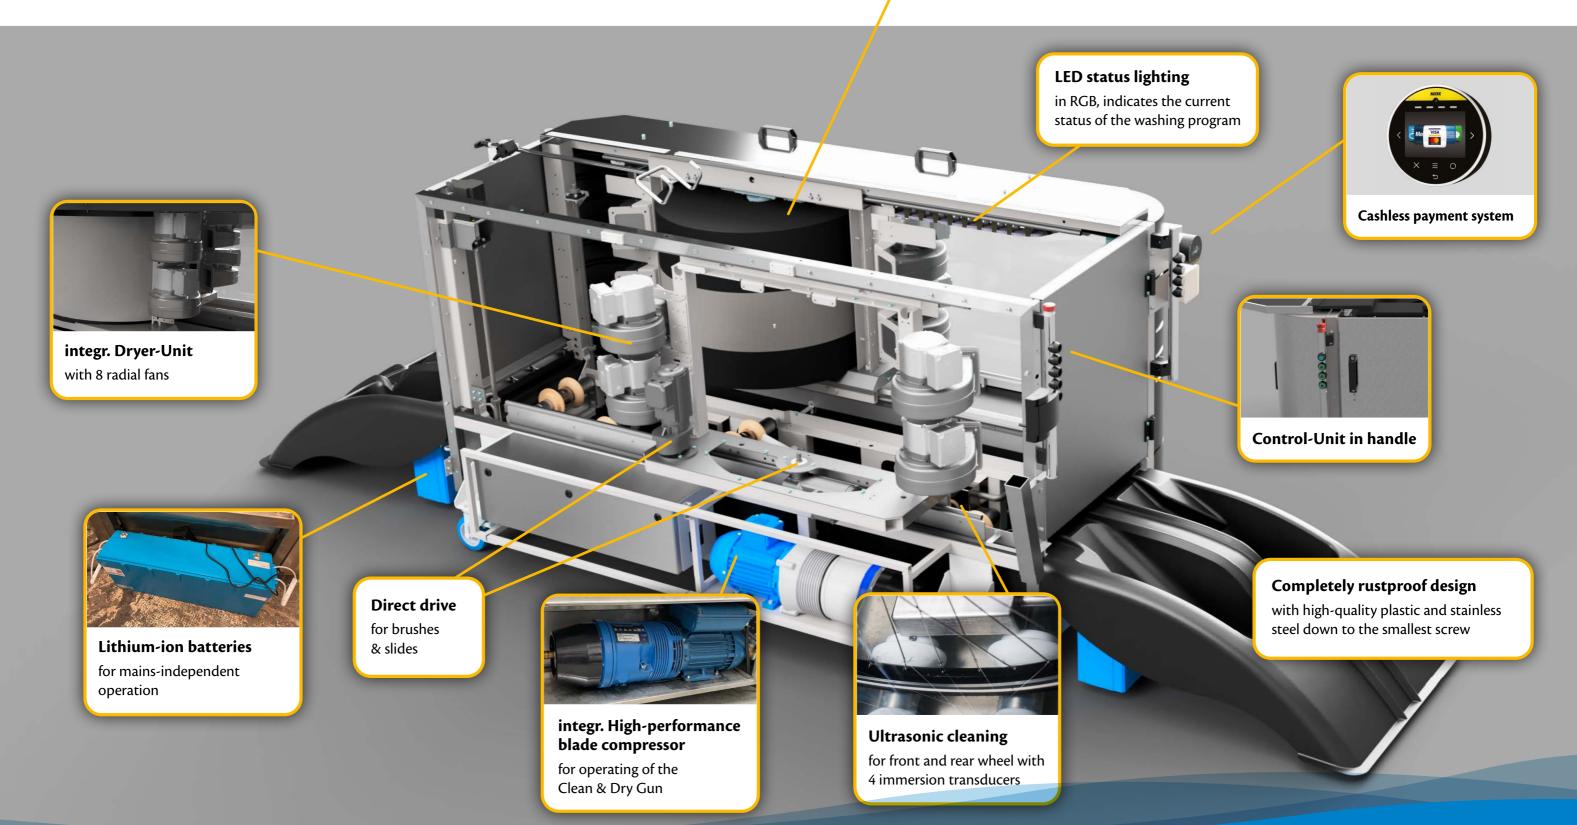

Highlights

- supports both HYBRID-Mode and ECO-Mode
- larger interior: XL e-bikes up to 2.1 m long fit completely into the machine
- user-friendly & ergonomic design: Washing process while passing in one direction
- 1.2 kW SMART ultrasonic cleaning of the tires and for high-quality carbon rims
- patented integrated drying with 8 radial fans
- · 3-way mounted pendulum washing brushes
- **electronic torque limiter** for brush rotation and brush movements
- "Bike Load": Bike loading aid into the machine (Patent Panding)
- optimized anti-slip wheel turning unit with ribbed V-Belt
- optimized window frames make maintenance work much easier
- better access to the technical components through optimized side flaps
- · numerous software and electronics upgrades

Tried & proven features

- patented technology, Dekra tested and CE compliant
- environmentally friendly and thorough bike cleaning in 2-5 minutes
- gentle EASYClick washing brushes for gentle cleaning on both sides
- adjustable nozzles for optimal efficiency
- plastic sewage collection ramps made of HDPE
- Splash protection brushes made of PE on top and on the sides
- · high-quality materials
- Wheels for easy transport

Technical specifications

Power connection 230 V, 1 Phase 16A (Peak power 2.4 kW)

Control cabinet IP54 Splash-/Dustproof according to VDE

and CE standard with plug-in installation

Weight 550 – 630 kg (depending on the equipment)

Dimensions 2365 x 1255 x 1235 mm (without ramps)

(width x depth x height) 4200 x 1255 x 1235 mm (with ramps)

Optionally available

- A Full stainless steel body with stainless steel corners
- B Integrated high-performance blade compressor, (2.2 kW) for pre-cleaning
- C Integrated dryer unit AIR, consisting of 8 radial fans (approx. 104 cm³ / min. air flow rate, power consumption 1.5 kW)
- D Control unit integrated in the handle
- E Cashless payment for operating the system as a self-service station (Apple Pay, Google Pay, NFC, Credit Card or via Mobile App)
- F cycleWASH Clean & Dry Gun for intensive pre-cleaning & drying













Further information and all equipment details can be found on our website at cyclewash.com/pro Subject to changes.